



Special Features:

- High Reliability & Accuracy
- Small & Lightweight
- Low Cost
- Custom Leads Available
- Magnetic Bias Force
- Gold Contacts
- High Shock & Temperature Versions
- Normally Open Contacts
- No Power Required

Specifications:

Sensitivity.....Radial
 G Range.....2 to 1000g
 Accuracy.....10% std, 5% avail
 Contact Type.....SPST, NO
 Contact Rating.....1.0A @ 28 VDC
 Insulation Resistance.....500 Mohms @ 500 VDC
 Operating Temperature.....-55C to 125C
 Response Time.....<1ms @ 1000g
 Reset.....Automatic g decay
 Seal.....Hermetic

ARROWS INDICATE SENSITIVITY
 RESPONSIVE TO G FORCES IN
 A SINGLE PLANE

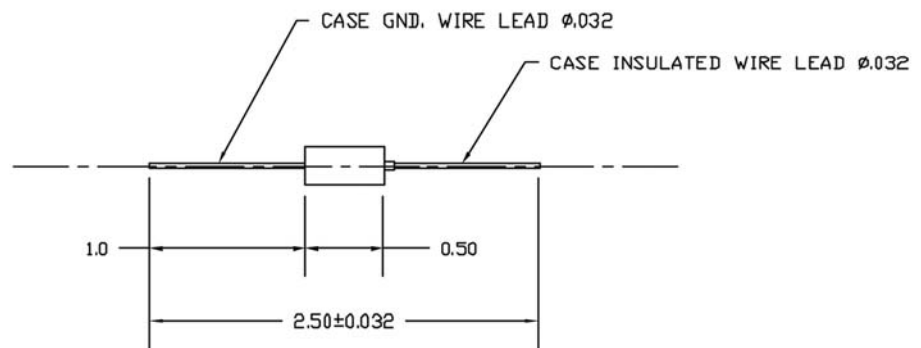

NOTE: SENSITIVITY CAN BE RESTRICTED TO A SINGLE
 DIRECTION UPON REQUEST.

The information on this data sheet is for reference only. Please verify all specifications by consulting our engineering department for the appropriate outline control drawing.

Inertia Switch Inc. • 70 South Greenbush Road • Orangeburg, New York 10962
 Phone: (845) 359-8300 • Fax: (845) 359-6227 • Website: www.inertiaswitch.com