




SPECIFICATIONS	
SENSITIVITY	UNIDIRECTIONAL, ADJUSTABLE
CONTACTS	S.P.S.T. N.O. OR N.C.
CONTACT RATING	0.5 AMPERES @ 28 VDC
CONTACT RESISTANCE	LESS THAN 1 OHM
ACCELERATION THRESHOLD	.2G TO 10G ± 10%
OPERATING TEMPERATURE	-55°C TO +85°C
VIBRATION	WITHSTAND 10G FROM 5Hz TO 2000Hz, 3 AXES
SHOCK	WITHSTAND 15G, 1/2 SINE WAVE, 11ms
CONSTRUCTION	EPOXY SEALED

### Special Features:

- High Reliability & Accuracy
- Small & Lightweight
- Low Cost
- No Power Required
- Environmentally Sealed
- Gold Contacts
- Available Normally Open or Closed
- Multiple Poles Available
- Precision Machined

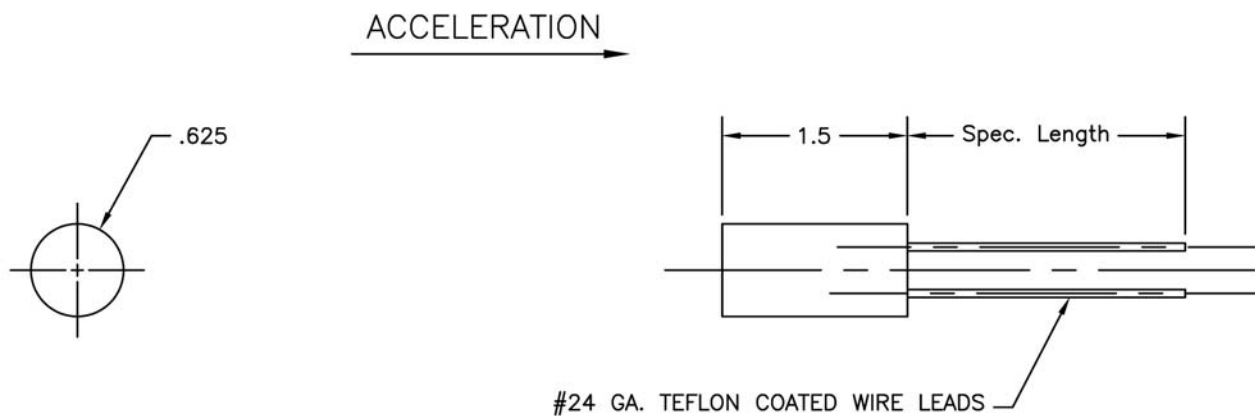

The information on this data sheet is for reference only. Please verify all specifications by consulting our engineering department for the appropriate outline control drawing.

Inertia Switch Inc. • 70 South Greenbush Road • Orangeburg, New York 10962  
Phone: (845) 359-8300 • Fax: (845) 359-6227 • Website: [www.inertiaswitch.com](http://www.inertiaswitch.com)