


**SWITCH CHARACTERISTICS**

Sensitivity.....Unidirectional  
 Range.....1 to 30 g  
 Accuracy.....10%  
 Contacts.....S.P.S.T, N.O.  
 Contact rating.....2 amps @ 28 VDC  
 Insulation Resistance.....200 Megohms @ 500 VDC  
 Reset.....Automatic once g's decay  
 Temp range.....-65°F + 250°F  
 Environmental.....Mil-E-5272  
 Construction.....Epoxy sealed

**6UO-115**

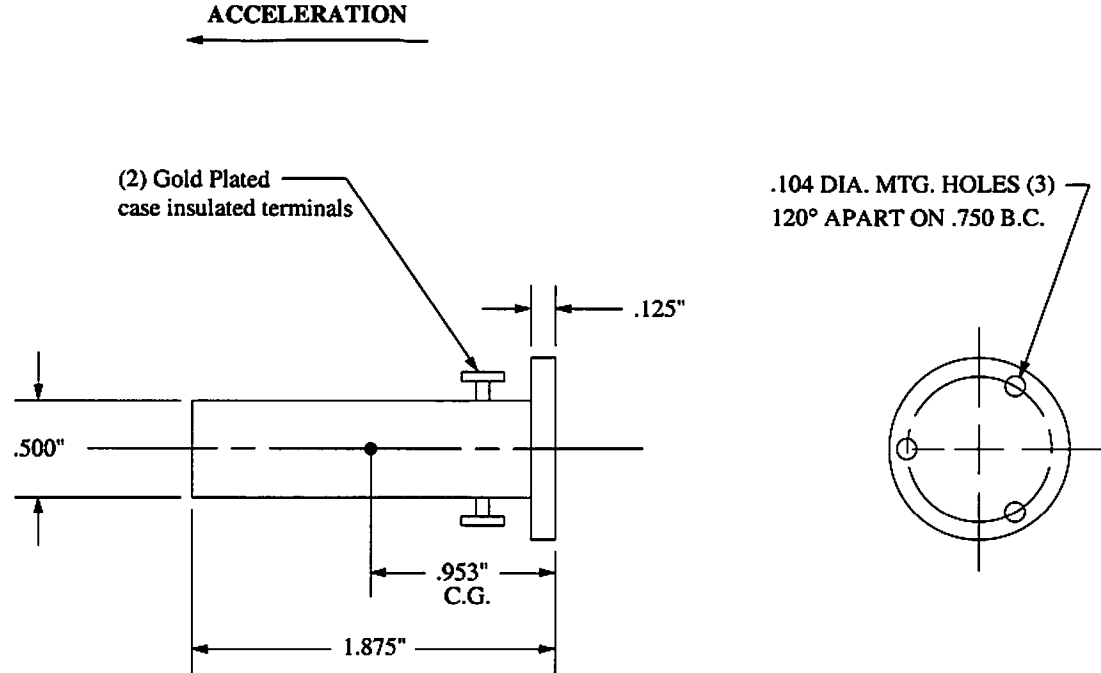

**UNLESS OTHERWISE SPECIFIED:**  
 ALL DIMS. TO BE MET AFTER PLATING. BREAK ALL SHARP EDGES .010 X 45°  
 DEC. TOL ± .005 FRAC. TOL ± 1/64 ANGULAR TOL ± 1°  
 ALL DIA'S CONCENTRIC TO ONE ANOTHER WITHIN .005 T.I.R.

Outline-Inertia Switch Model 6UO-115			
MATERIAL			
FINISH			
HEAT TREAT		SCALE 1:1	
DWN.	C.S.	CHK'D.	B.D.
		APPR'VD. M.F.	

**INERTIA SWITCH INC.**  
 W. NYACK, N.Y.

**A15700**

REV.	DESCRIPTION	DATE	CO.NO.	CHK'D	NEXT ASSEM.	QTY.
<b>REVISIONS</b>					<b>APPLICATION</b>	