


SPECIFICATIONS	
SENSITIVITY	BIDIRECTIONAL
ACTUATE G LEVEL RANGE	1 TO 100 G'S
STANDARD TOLERANCE	±10%
CONTACT TYPE	LATCHING, VISUAL INDICATOR
RESET	MANUAL PUSHBUTTON

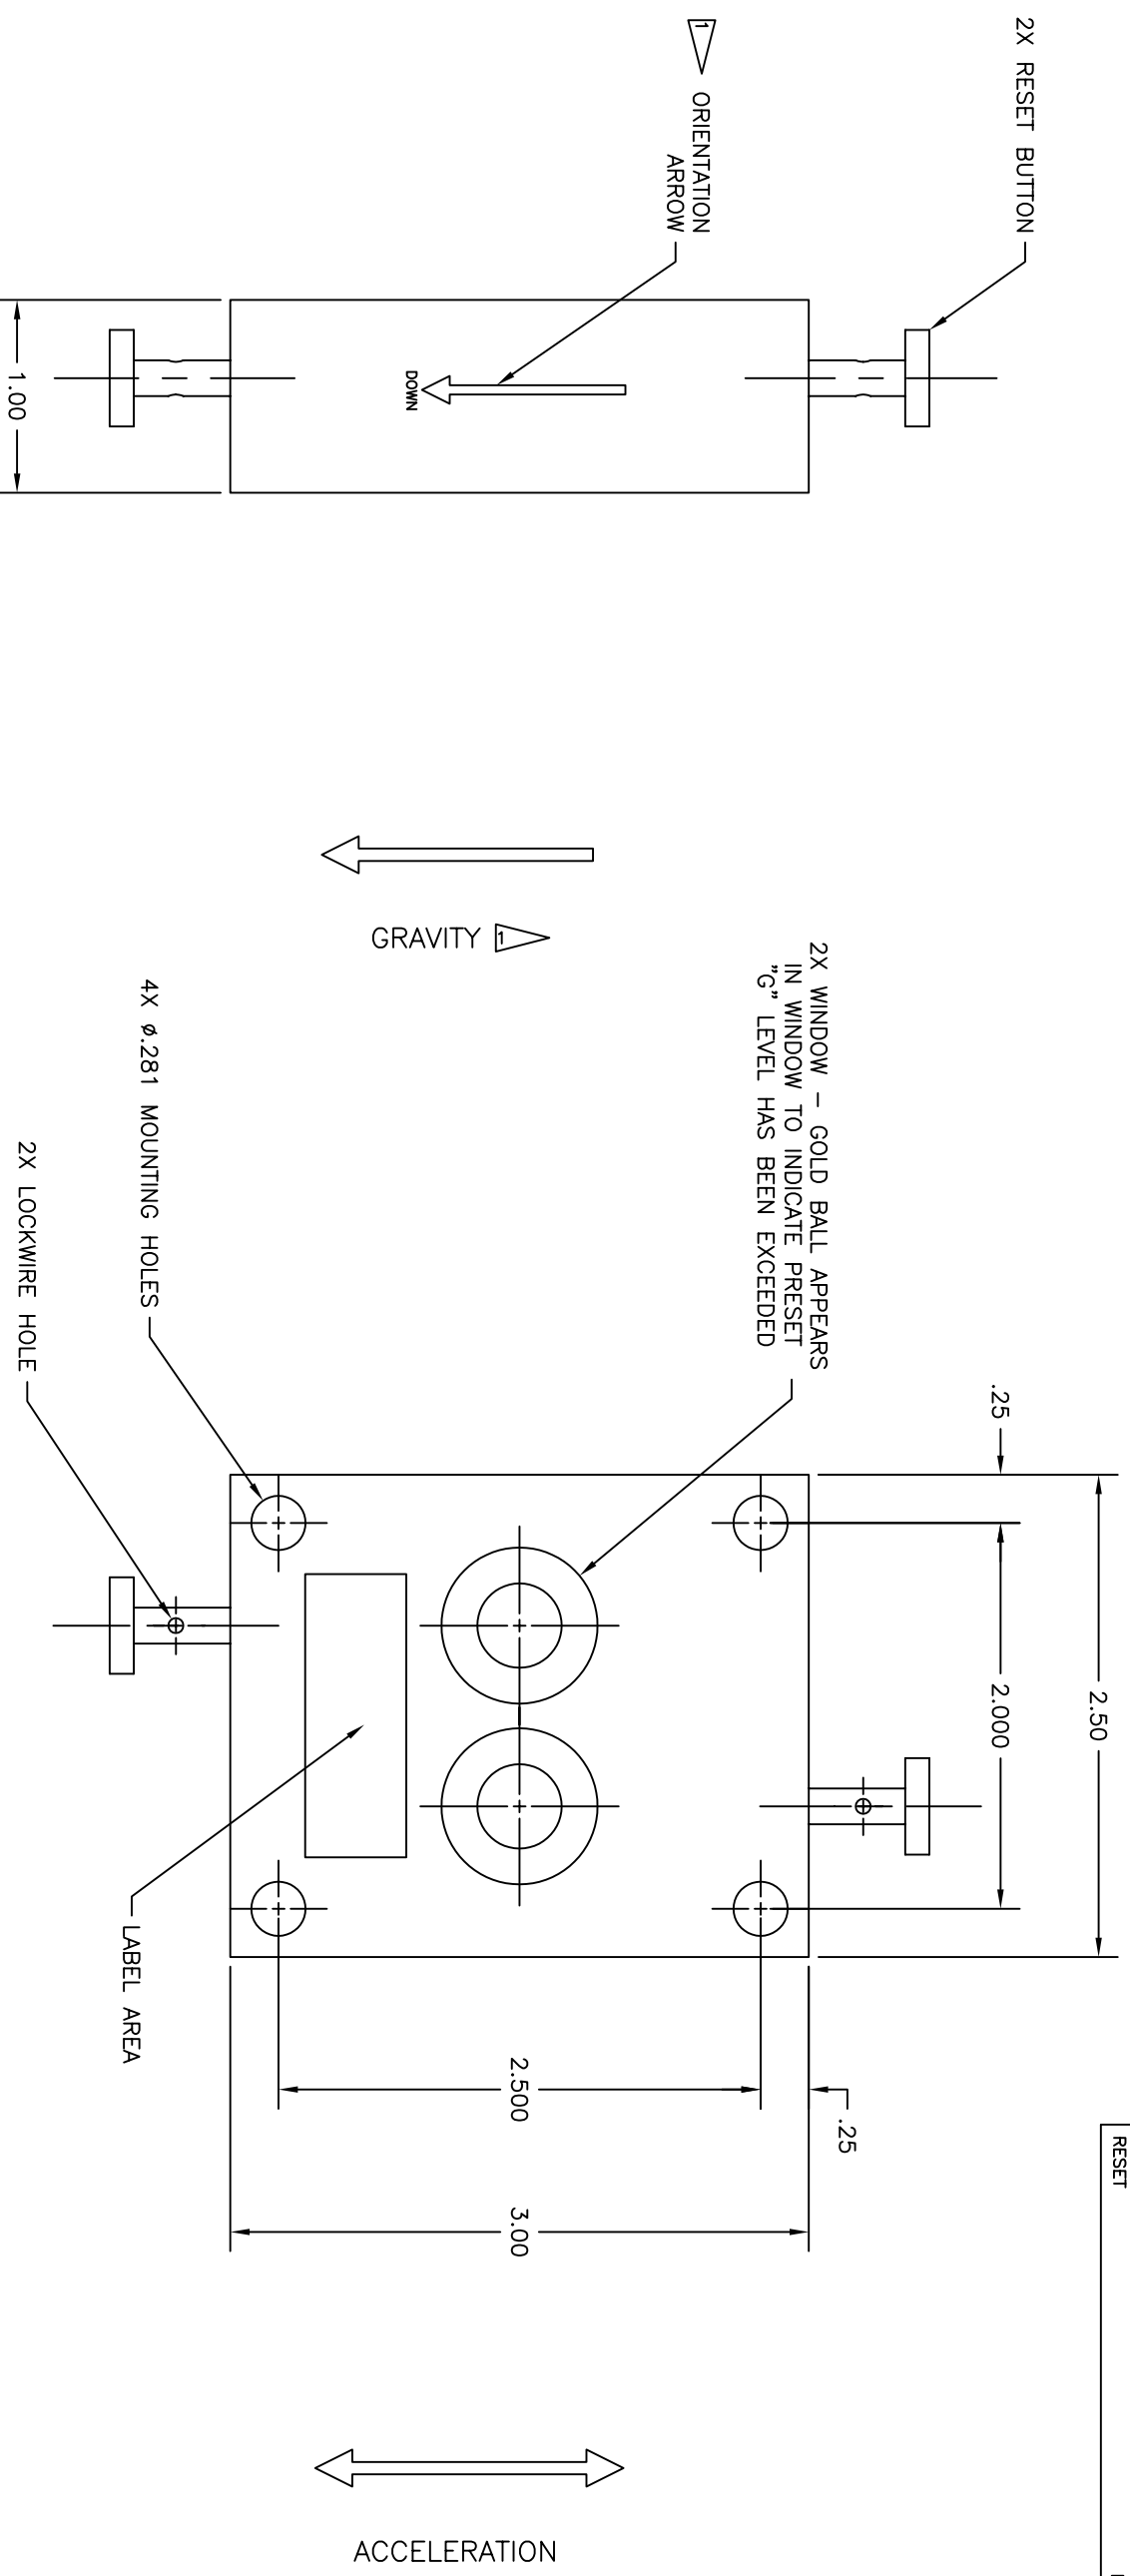

NOTES:

1. DIRECTION OF GRAVITY IS ONLY APPLICABLE WHEN UNIT IS SPECIFIED TO WORK IN A VERTICAL ORIENTATION WITH RESPECT TO THE EARTH. SUCH MODELS SHALL CONTAIN AN ARROW ON THE SIDE OF THE UNIT.

REV	DESCRIPTION	DATE	CO. NO.	CHK'D	USED ON	NEXT ASSEM.	QTY	DWNT	HEAT TREAT	SCALE	DWG NO.	REV
A	REDRAWN: PAPER SIZE WAS "A"	5/9/05	23884	ATS	SR-345B		1	ATS		1:1	B14386	A
<p>UNLESS OTHERWISE SPECIFIED: BREAK ALL SHARP EDGES .005" X 45° #64 MACHINE FINISH. ALL DIMS. TO BE MET AFTER PLATING. DIMENSIONS ARE IN INCHES.</p> <p>SYMBOLS: ● CRITICAL DIMENSION ▽ TEXT NOTE</p> <p>TOLERANCES: DEC .XX ±.010 DEC .XXX ±.005 FRA 1/64 ±.005 DIA CONC ±.005</p>												
<p>REVISIONS</p>												
<p>ORANGEBURG, NEW YORK CAGE CODE: 21928 Inertia Switch INCORPORATED</p>												