
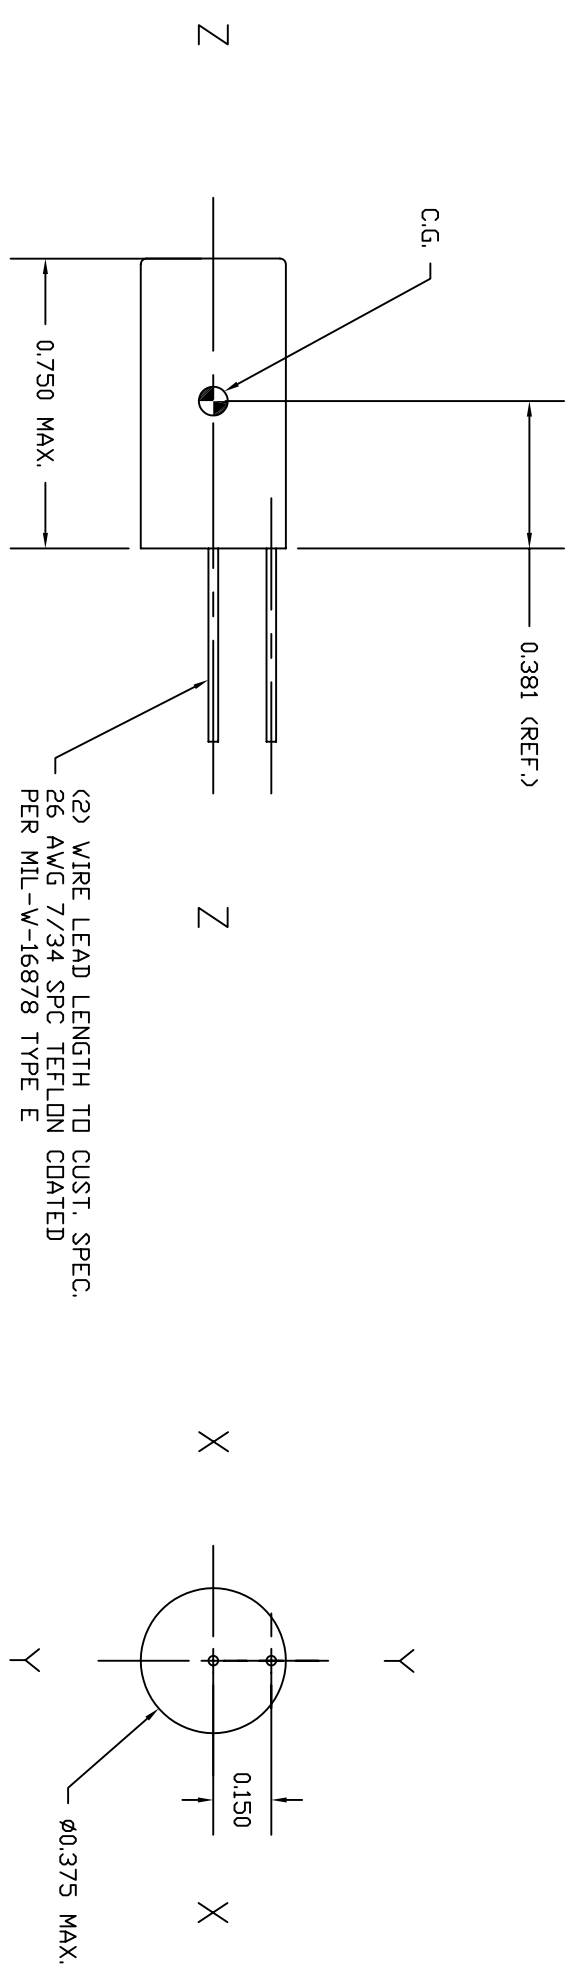


SPECIFICATIONS	
SENSITIVITY	UNIDIRECTIONAL
CONTACT RESISTANCE	LESS THAN 2.0 OHMS
INSULATION RESISTANCE	500 MEGS MIN @ 500 V.D.C.
CONTACT RATING	1.0 AMPS @ 28 V.D.C.
TEMP. OPERATING	-65°F TD +250°F
G SETTING	2 TD 10G ±10%
CONTACT TYPE	S.P.S.T. N.C.
RESPONSE TIME	LESS THAN 1 MS
CONSTRUCTION	HERMETICALLY SEALED

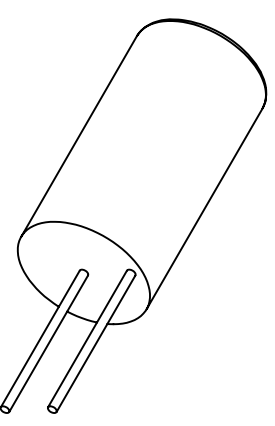

ACCELERATE IN THIS DIRECTION TO OPEN CONTACT

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION SUBMITTED IN CONFIDENCE AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF INERTIA SWITCH, INC.

TITLE: OUTLINE MODEL 6UC-923				SCALE: 2:1		DWG NO. B16888	
MATERIAL				HEAT TREAT		REV	
FINISH				SCALE: 2:1		REV	
TOLERANCES:				SCALE: 2:1		REV	
UNLESS OTHERWISE SPECIFIED:				SCALE: 2:1		REV	
BREAK ALL SHARP EDGES .010" X 45°				SCALE: 2:1		REV	
ALL DIMS. TO BE MET AFTER PLATING.				SCALE: 2:1		REV	
DIMENSIONS ARE IN INCHES				SCALE: 2:1		REV	
TOLERANCES:				SCALE: 2:1		REV	
XX ±.010				SCALE: 2:1		REV	
DEC .XXX ±.005				SCALE: 2:1		REV	
FRAC ± 1/64				SCALE: 2:1		REV	
ANG ± .005				SCALE: 2:1		REV	
DIA CONC ± .005				SCALE: 2:1		REV	
USED ON				SCALE: 2:1		REV	
NEXT ASSEM.				SCALE: 2:1		REV	
QTY				SCALE: 2:1		REV	
1				SCALE: 2:1		REV	
DWN. AT S				SCALE: 2:1		REV	
CHK'D ARS				SCALE: 2:1		REV	
APPROV'D 1/2/01				SCALE: 2:1		REV	
REV				SCALE: 2:1		REV	
DESCRIPTION				SCALE: 2:1		REV	
REVISIONS				SCALE: 2:1		REV	
DATE				SCALE: 2:1		REV	
CO. NO.				SCALE: 2:1		REV	
CHK'D				SCALE: 2:1		REV	