


# 6UO-627A

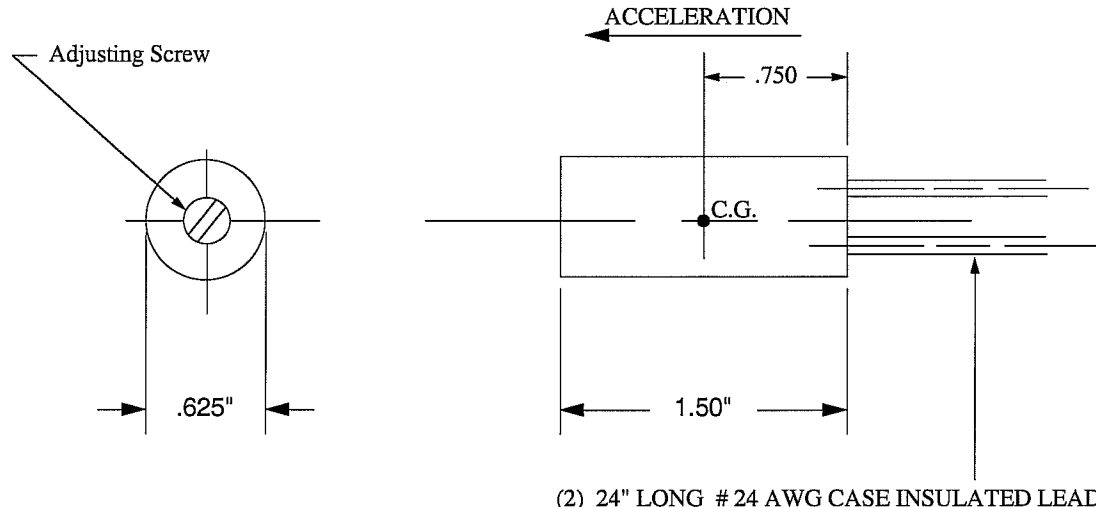

### Switch Characteristics

Sensitivity.....Unidirectional  
 G Range.....0.2 to 2G  
 Contacts.....Normally open  
 Reset.....Automatic, once "G's" decay  
 Insulation .....200 Megohms Min.  
 Resistance @ 500 VDC  
 Contact Rating.....(.5) Amps. @ 24 VDC.

(2) 24" LONG # 24 AWG CASE INSULATED LEADS

**UNLESS OTHERWISE SPECIFIED:**  
 ALL DIMS. TO BE MET AFTER PLATING. BREAK ALL SHARP EDGES .010 X 45°  
 DEC. TOL ± .005 FRAC. TOL. ± 1/64 ANGULAR TOL. ± 1°  
 ALL DIA'S CONCENTRIC TO ONE ANOTHER WITHIN .005 T.I.R.

<b>OUTLINE DRAWING (6UO-627A)</b>		
MATERIAL		
FINISH		
HEAT TREAT		SCALE <b>1:1</b>
DWN.	CHK'D.	APPR'V'D.

**INERTIA  
 SWITCH INC.**  
 W. NYACK, N.Y.  
**A15245**

REV.	DESCRIPTION	DATE	CO.NO.	CHK'D	NEXT ASSEM.	QTY.
<b>REVISIONS</b>					<b>APPLICATION</b>	